



Angle Extended Tubenut Lever Tools (5 to 62 Nm)

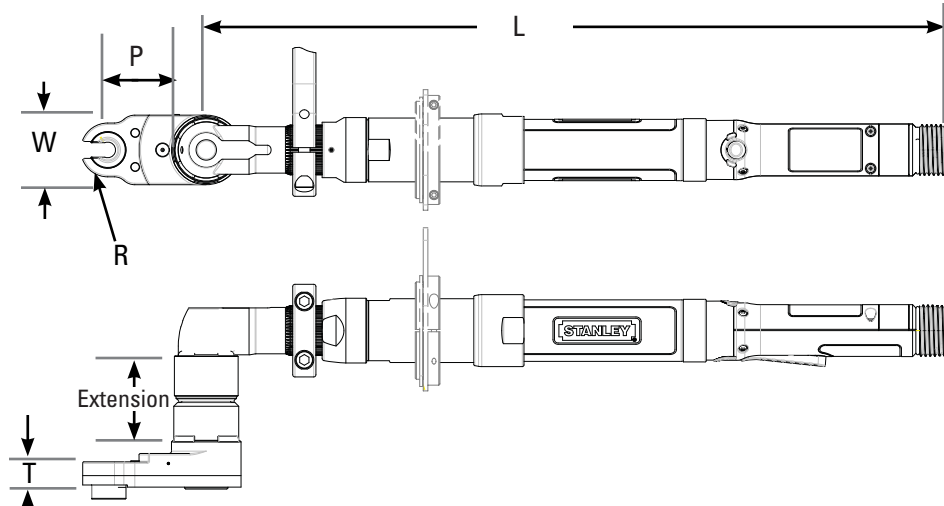

Model	Rated Speed		Torque		"R" Nose Radius		"T" Thickness		"W" Width		"P" Length		"L" Length		Weight		Maximum Hex Size		Maximum Tube Size	
	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in	
E33LT288-25	670	25	18.4	13	0.52	9	0.34	42	1.66	16	0.63	508	20	2.5	5.4	13	1/2"	9.3	0.365	
E33LT387-25	1050	25	18.4	13	0.52	14	0.54	42	1.66	34	1.34	490	19.3	2.5	5.4	13	1/2"	9.3	0.365	
E33LT312-30	765	30	22.1	18	0.73	14	0.56	48	1.88	47	1.86	539	21.2	2.5	5.4	18	11/16"	11.6	0.455	
EA34LT361-41	605	41	30.2	19	0.73	16	0.63	48	1.88	44	1.72	574	24.4	2.5	5.4	19	3/4"	11.6	0.455	
E34LT283-62	385	62	45.7	26	1.04	19	0.77	75	2.94	65	2.55	557	21.9	2.5	5.4	27	1-1/16"	19.4	0.765	
E34LT296-62	385	62	45.7	26	1.04	19	0.77	75	2.94	65	2.55	620	24.4	2.5	5.4	27	1-1/16"	19.4	0.765	

Vertical Tubenut Lever Tools (5 to 30 Nm)

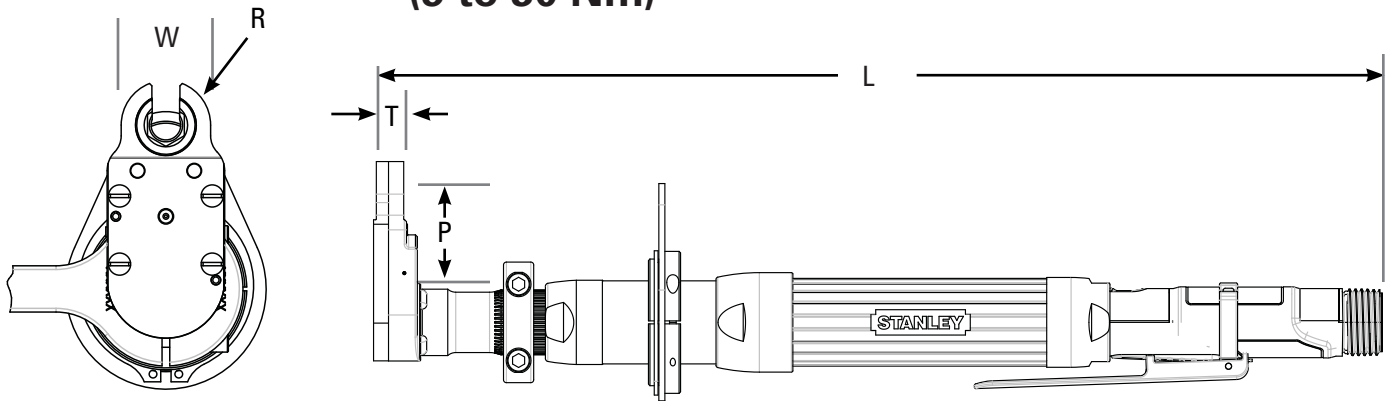

Model	Rated Speed		Torque		"R" Nose Radius		"T" Thickness		"W" Width		"P" Length		"L" Length		Weight		Maximum Hex Size		Maximum Tube Size	
	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in	
E33LT540-25*†	1010	25	18.4	18	0.73	14	0.56	48	1.88	76	3.01	456	18	2.5	5.4	18	11/16	11.6	0.455	
EA34LT150-30	940	30	22.1	18	0.73	14	0.56	48	1.88	47	1.86	515	20.3	2.5	5.4	19	3/4	11.6	0.455	

* Reverse Rotation

† Socket on Top

× Indexable Foot

Check the symbols to ensure the correct tool is chosen for the application. Tubenuts are designed to be used with the socket on the bottom (base plate side) or on the top (angle head side) and in Clockwise or Counter-clockwise (Reverse) rotation. Tools without symbols have the socket on the bottom and run clockwise.

STANLEY Assembly Technologies has designed Tubenut and Crowfoot outputs for over 50 years. Contact STANLEY Assembly Technologies if you would like one designed for your specific application.